
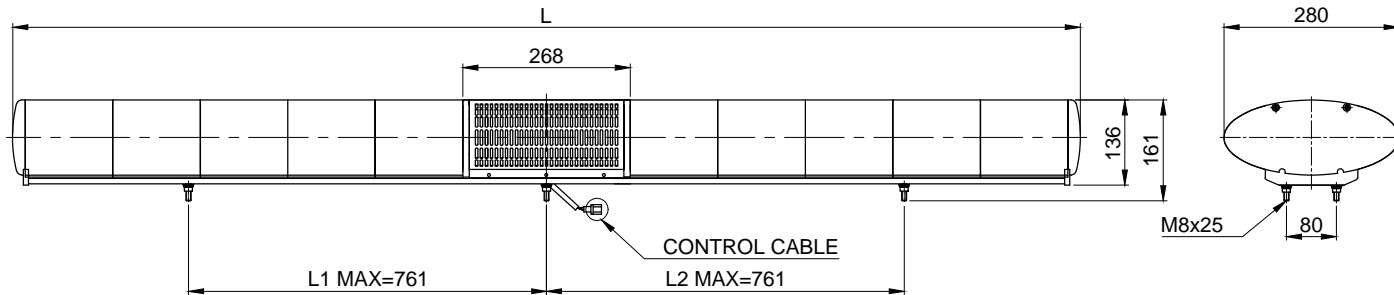


MARK	DATE	REVISION	REVISER	APP.BY
①				
②				
③				

MODEL NO	ELML			
MATERIAL	HOUSING-PC			
	LENS-PC			
	REFLECTOR-HEAT RESISTING ABS			
	SPEAKER COVER-SUS			
	BOARD-AL			
COLOR OF LENS	RED(), AMBER(), GREEN(), BLUE()			
REV. PER MIN	60-80			
USE VOLT.	LED	CURRENT	DC12V	MAX. 1.000A
			DC24V	MAX. 0.555A
VOLUME	MAX. 126dB at 1m			
PROTECTION GRADE	WATER & DUST PROOF IP56			
COLOR OF HOUSING	MAKER STANDARD			
ACTION	LED LAMP STROBE LIGHT			

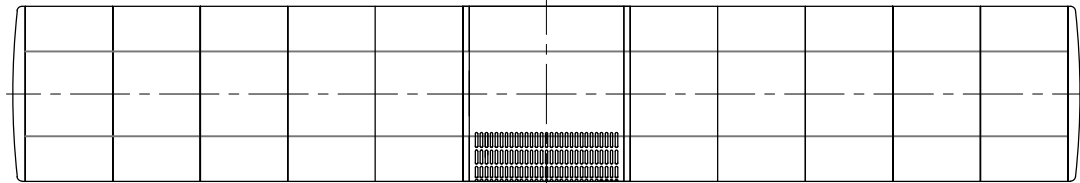

L(LENGTH)	
ELM-1 (BLOCKS 2)	588mm
ELM-2 (BLOCKS 4)	868mm
ELM-3 (BLOCKS 6)	1148mm
ELM-4 (BLOCKS 8)	1428mm
ELM-5 (BLOCKS 10)	1708mm

※ POWER CABLE : VCTF (0.75sq) x 2C 3m

	ISO2768-1 : CLASS OF TOLERANCE					SURFACE FINISH
	f	m	Ⓢ	v		
FOR LINEAR DIMENSIONS	0.5-3	±0.05	±0.1	±0.2	-	
	3-6			±0.3	±0.5	
	6-30	±0.1	±0.2	±0.5	±1	
	30-120	±0.15	±0.3	±0.8	±1.5	
	120-400	±0.2	±0.5	±1.2	±2.5	
	400-1000	±0.3	±0.8	±2	±4	
FOR ANGULAR DIMENSIONS	0-10	±1°		±1°30'	±3°	
	10-50	±0°30'		±1°	±2°	
	50-120	±0°20'		±0°30'	±1°	
	120-400	±0°10'		±0°13'	±0°30'	

Nr.	DWG. NO.	TITLE/ NAME		MAT'L	1	
DSND BY	CHKD BY	CHKD BY	APRV BY	VIEW	DATE	REFERENCE
S.H.KIM	J.H.PARK		J.K.HAN	3	2016.08.30	
TITLE			ELML	MODEL		
			OUTLINE DRAWING	ELML		
				DWG. NO.		
				ELML_OUT		
SCALE	SIZE	REV	SHEET			
N/S	A4	00	1/1			