


MARK	DATE	REVISION	REVISER	APP. BY
①				
②				
③				

MODEL NO	QA100HLS				
MATERIAL	LENS-PC				
	HOUSING-ABS				
	-				
COLOR OF LENS	RED(), AMBER()				
FLASHES PER MIN.	45 - 55				
USE VOLT.	LED	CURRENT	DC12V ~ 24V	0.2W	MAX. 1.200A
PROTECTION GRADE	WATER & DUST PROOF IP66				
CABLE ENTRY	φ9 LEAD HOLE				
COLOR OF HOUSING	MAKER STANDARD				
ACTION	LED LAMP STROBE LIGHT				

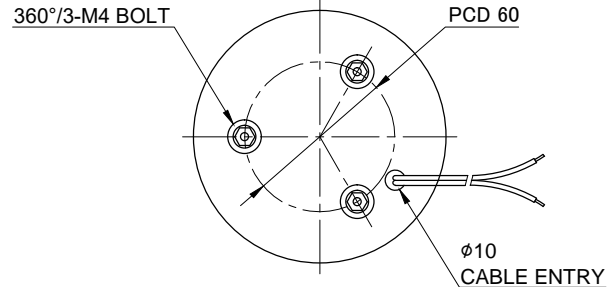

ISO2768-1 : CLASS OF TOLERANCE					SURFACE FINISH	
FOR LINEAR DIMENSIONS		f	m	Ⓢ	v	
	0.5-3	±0.05	±0.1	±0.2	-	
	3-6			±0.3	±0.5	
	6-30	±0.1	±0.2	±0.5	±1	
	30-120	±0.15	±0.3	±0.8	±1.5	
120-400	±0.2	±0.5	±1.2	±2.5		
400-1000	±0.3	±0.8	±2	±4		
FOR ANGULAR DIMENSIONS						
	0-10	±1°		±1°30'	±3°	
	10-50	±0°30'		±1°	±2°	
	50-120	±0°20'		±0°30'	±1°	
120-400	±0°10'		±0°13'	±0°30'		

Nr.	DWG. NO.	TITLE/ NAME		MAT'L	QTY	REFERENCE
DSND BY	CHKD BY	CHKD BY	APRV BY	VIEW	DATE	
S.H.KIM	J.H.PARK		J.K.HAN	3	2016.10.05	
TITLE				MODEL		
QA100HLS OUTLINE DRAWING				QA100HLS		
				DWG. NO.		
				QA100HLS_OUT		
SCALE	SIZE	REV	SHEET			
N/S	A4	00	1/1			