

1 2 3 4 5 6

A

B

C

D

A


B

C

D

MARK	DATE	REVISION	REVISER	APP.BY
①				
②				
③				

MODEL NO		QT50ML-BZ					
MATERIAL		HOUSING-PC					
		LENS-PC					
		COVER-PC					
COLOR OF LENS		RED(), AMBER(), GREEN(), BLUE(), WHITE()					
KIND OF FUNCTION		USE VOLT.	STEADY	FLASHES	STROBE	REVOLVING	
LED MODULE	USE VOLT.	LAYER 1 CURRNET (MAX.)	DC12V	0.080A	0.080A	0.100A	0.050A
			DC24V	0.040A	0.040A	0.120A	0.060A
			AC110V	0.018A	0.018A	-	-
BUZZER MODULE	USE VOLT.	CURRNET (MAX.)	DC12V	0.015A			
			DC24V	0.028A			
			AC110V	0.021A			
			AC220V	0.038A			
PROTECTION GRADE		WATER & DUST PROOF IP65					
CABLE ENTRY		ø8 LEAD HOLE					
COLOR OF HOUSING		MAKER STANDARD					
ACTION		LED SIGNAL TOWER LAMP					

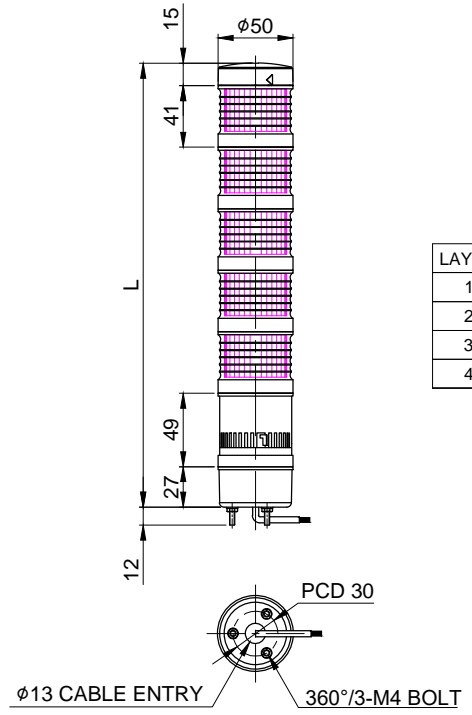

LAYER	L
1	132
2	173
3	214
4	255

	ISO2768-1 : CLASS OF TOLERANCE					SURFACE FINISH
	f	m	(C)	v		
FOR LINEAR DIMENSIONS	0.5-3	±0.05	±0.1	±0.2	-	
	3-6			±0.3	±0.5	
	6-30	±0.1	±0.2	±0.5	±1	
	30-120	±0.15	±0.3	±0.8	±1.5	
	120-400	±0.2	±0.5	±1.2	±2.5	
	400-1000	±0.3	±0.8	±2	±4	
FOR ANGULAR DIMENSIONS	0-10	±1°		±1°30'	±3°	
	10-50	±0°30'		±1°	±2°	
	50-120	±0°20'		±0°30'	±1°	
	120-400	±0°10'		±0°13'	±0°30'	

Nr.	DWG. NO.	TITLE/ NAME		MAT'L	1	QTY	REFERENCE
DSND BY	CHKD BY	CHKD BY	APRV BY	VIEW	DATE		
S.H.KIM	J.H.PARK		J.K.HAN	3	2016.08.30		
TITLE				MODEL			
QT50ML-BZ OUTLINE DRAWING				QT50ML-BZ			
				DWG. NO.			
				QT50ML-BZ_OUT			
SCALE		SIZE	REV	SHEET			
N/S		A4	00	1/1			

1 2 3 4 5 6

A4(297X210)