


1 2 3 4 5 6

A


A

MARK	DATE	REVISION	REVISER	APP .BY
△				
△				
△				

MODEL NO		QWTD				
MATERIAL		HOUSING-ABS				
		LENS-PC				
		COVER-ABS				
COLOR OF LENS		RED(), AMBER(), GREEN(), BLUE(), WHITE()				
USE VOLT.	LED	CURRENT	DC12V	0.08W	MAX. 0.040A	LAYER1
			DC24V		MAX. 0.040A	LAYER1
			AC110V		MAX. 0.024A	LAYER1
			AC220V		MAX. 0.024A	LAYER1
KIND OF SOUND		WS	5 Pre-Recorded Warning Sounds			
		WP	5 Pre-Recorded Special Warning Sounds			
		WM	5 Pre-Recorded Melodie			
		WA	5 Pre-Recorded Alarms			
VOLUME		MAX. 85dB at 1m				
PROTECTION GRADE		WATER & DUST PROOF IP54				
CABLE ENTRY		φ13 LEAD HOLE				
COLOR OF HOUSING		MAKER STANDARD				
ACTION		LED STEADY/FLASHING SIGNAL TOWERS				



LAYER	L
1	154
2	195
3	236
4	277
5	318

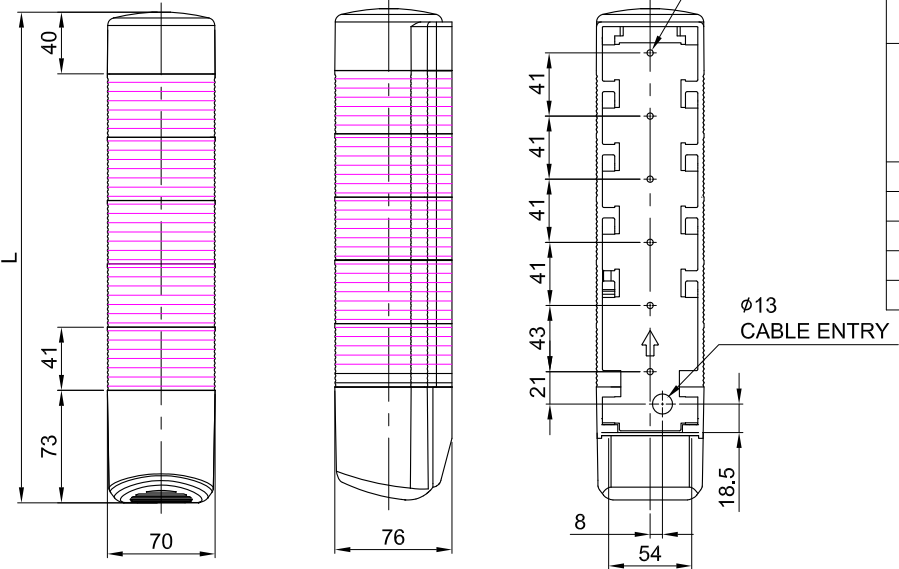

B

B

C

C

D

D

ISO2768-1 : CLASS OF TOLERANCE						SURFACE FINISH	-			1		-	
FOR LINEAR DIMENSIONS	0.5-3	f	m	Ⓢ	v		Nr.	DWG. NO.	TITLE/ NAME	MAT'L	QTY	REFERENCE	
	3-6	±0.05	±0.1	±0.2	±0.5	DSND BY	CHKD BY	CHKD BY	APRV BY	VIEW	DATE		
	6-30	±0.1	±0.2	±0.5	±1	S.H.KIM	J.H.PARK		J.K.HAN	3	2016.08.30		
	30-120	±0.15	±0.3	±0.8	±1.5	TITLE			MODEL				
	120-400	±0.2	±0.5	±1.2	±2.5	QWTD			QWTD				
	400-1000	±0.3	±0.8	±2	±4	OUTLINE DRAWING			QWTD_OUT				
FOR ANGULAR DIMENSIONS	0-10	±1°		±1°30'	±3°	DWG. NO.		QWTD_OUT					
	10-50	±0°30'		±1°	±2°	SCALE	SIZE	REV	SHEET				
	50-120	±0°20'		±0°30'	±1°	N/S	A4	00	1/1				
	120-400	±0°10'		±0°13'	±0°30'								

1 2 3 4 5 6

A4(297X210)