


LAYER	L
1	195
2	295
3	395

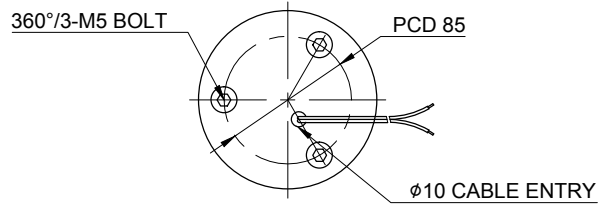

MARK	DATE	REVISION	REVISER	APP .BY
①				
②				
③				

MODEL NO	S125TL					
MATERIAL	HOUSING-ABS					
	LENS-AS					
	REFLECTOR-HEAT RESISTING ABS					
COLOR OF LENS	RED(), AMBER(), GREEN()					
FLASHING PER MIN.	60 ~ 80					
USE VOLT.	LED	CURRENT	DC12V	0.08W	MAX. 0.300A	LAYER1
			DC24V		MAX. 0.200A	LAYER1
			AC110V		MAX. 0.077A	LAYER1
			AC220V		MAX. 0.038A	LAYER1
PROTECTION GRADE	WATER & DUST PROOF IP44					
CABLE ENTRY	Ø10 LEAD HOLE					
COLOR OF HOUSING	MAKER STANDARD					
ACTION	LED STEADY/FLASHING LIGHT					

	ISO2768-1 : CLASS OF TOLERANCE					SURFACE FINISH
	f	m	Ⓢ	v		
FOR LINEAR DIMENSIONS	0.5~3	±0.05	±0.1	±0.2	-	
	3~6			±0.3	±0.5	
	6~30	±0.1	±0.2	±0.5	±1	
	30~120	±0.15	±0.3	±0.8	±1.5	
	120~400	±0.2	±0.5	±1.2	±2.5	
	400~1000	±0.3	±0.8	±2	±4	
FOR ANGULAR DIMENSIONS	0~10	±1°		±1°30'	±3°	
	10~50	±0°30'		±1°	±2°	
	50~120	±0°20'		±0°30'	±1°	
	120~400	±0°10'		±0°13'	±0°30'	

Nr.	DWG. NO.	TITLE/ NAME		MAT'L	QTY	REFERENCE
DSND BY	CHKD BY	CHKD BY	APRV BY	VIEW	DATE	
S.H.KIM	J.H.PARK		J.K.HAN	3	2016.08.30	
TITLE			MODEL			
S125TL OUTLINE DRAWING			S125TL			
			DWG. NO.	S125TL_OUT		
SCALE	SIZE	REV	SHEET			
N/S	A4	00	1/1			

A4(297X210)