

1 2 3 4 5 6


A

A

MARK	DATE	REVISION	REVISER	APP .BY
△				
△				
△				

B

B




MODEL NO		S50B		
MATERIAL		HOUSING-ABS		
		LENS-AS		
COLOR OF LENS		RED(), AMBER(), GREEN(), BLUE()		
USE VOLT.	BULB	CURRENT	DC12V	MAX. 0.437A
			DC24V	MAX. 0.290A
			AC110V	MAX. 0.051A
			AC220V	MAX. 0.025A
PROTECTION GRADE		WATER & DUST PROOF IP44		
CABLE ENTRY		φ9 LEAD HOLE		
COLOR OF HOUSING		MAKER STANDARD		
ACTION		BULB STEADY WARNING LIGHT		

△

△

C

C

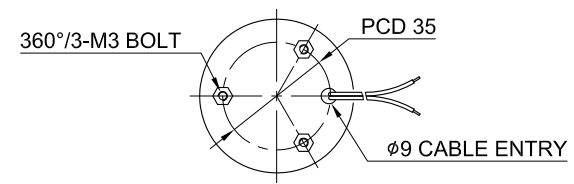

D

D

ISO2768-1 : CLASS OF TOLERANCE						SURFACE FINISH	-		1		-	
FOR LINEAR DIMENSIONS		f	m	⊙	v		Nr.	DWG. NO.	TITLE/ NAME	MAT'L	QTY	REFERENCE
	0.5-3			±0.2	-	DSND BY	CHKD BY	CHKD BY	APRV BY	VIEW	DATE	
	3-6	±0.05	±0.1	±0.3	±0.5	S.H.KIM	J.H.PARK		J.K.HAN	3	2016.08.30	
	6-30	±0.1	±0.2	±0.5	±1	TITLE		S50B		MODEL		
	30-120	±0.15	±0.3	±0.8	±1.5	OUTLINE DRAWING		S50B				
	120-400	±0.2	±0.5	±1.2	±2.5			DWG. NO.				
400-1000	±0.3	±0.8	±2	±4			S50B_OUT					
FOR ANGULAR DIMENSIONS	0-10	±1°		±1°30'	±3°	SCALE		SIZE		REV		
	10-50	±0°30'		±1°	±2°	N/S		A4		00		
	50-120	±0°20'		±0°30'	±1°					SHEET		
	120-400	±0°10'		±0°13'	±0°30'					1/1		

1 2 3 4 5 6

A4(297X210)