


MARK	DATE	REVISION	REVISER	APP. BY
Δ				
Δ				
Δ				

MODEL No.	SH4140-RL
MATERIAL	HEAD & BODY - DIE CAST AL BOLT, NUT, ROLLER & ETC. - SUS304
CONACT	2CKT-DB, 1A1B, 250VAC 6A
PROTECTION GRADE	WATER & DUST PROOF - IP56
CABLE ENTRY	PF 1/2
COLOUR	MAKER STANDARD
INSULATION RESISTANCE	100MΩ MIN. at 500V DC

■ Operating Characteristics

OF max. g	1,400
RF min. g	165
PT	20° ± 5°
MD max.	5°
TT min	70°

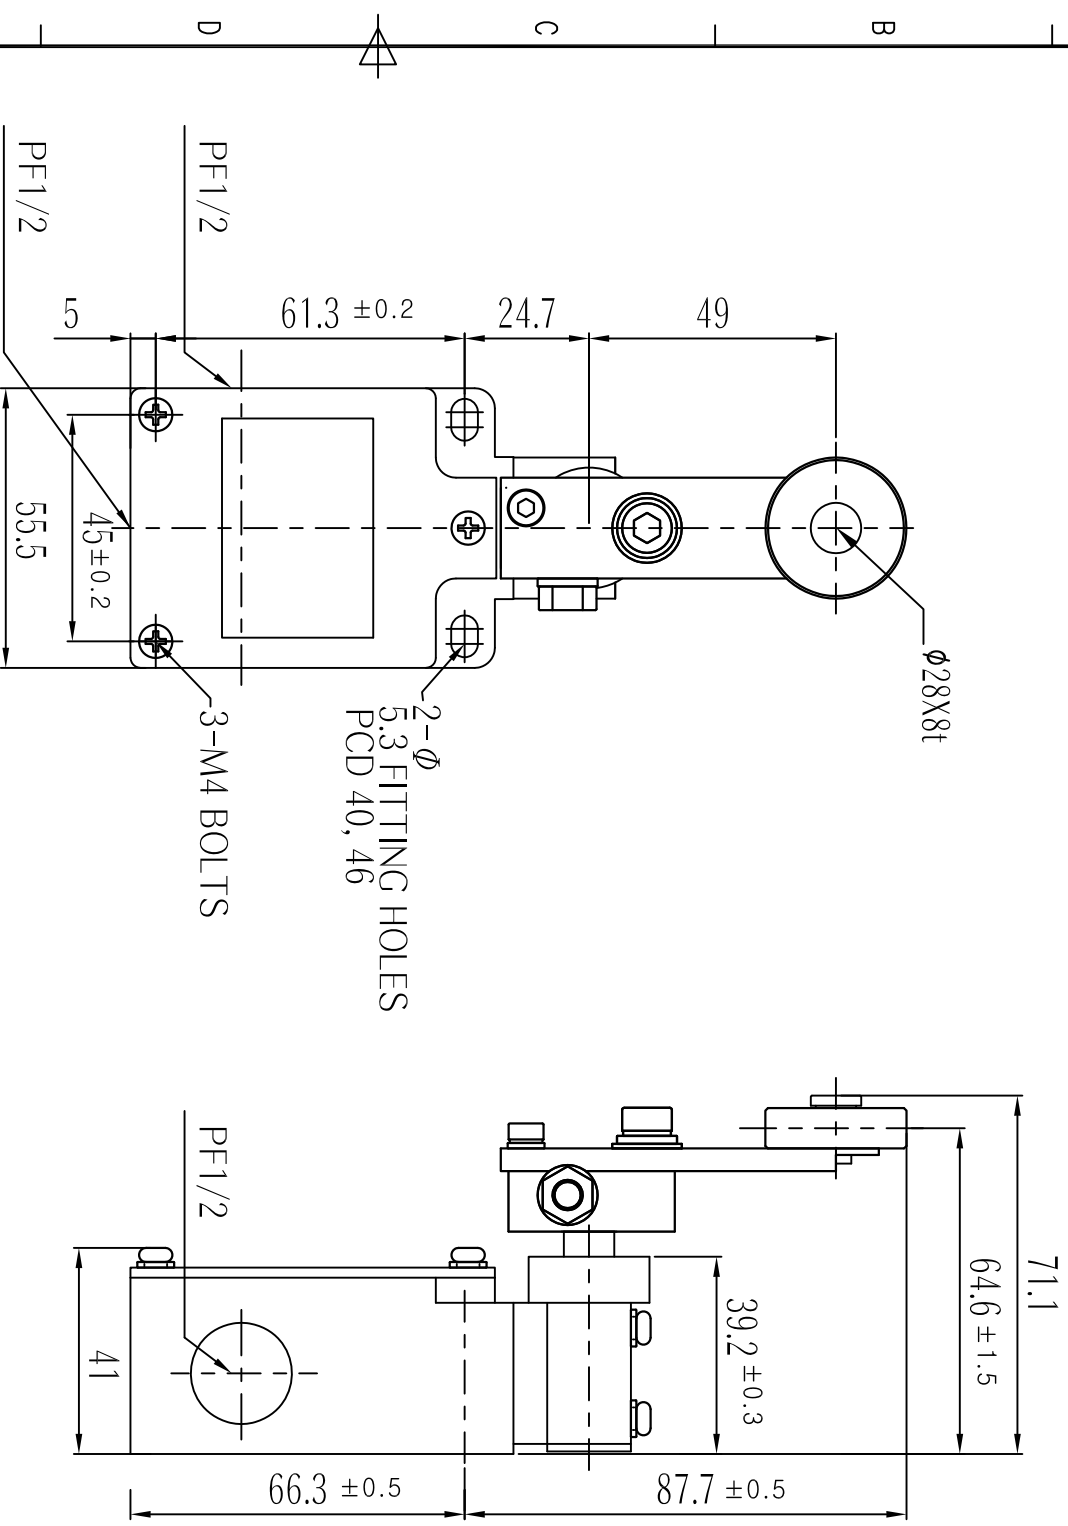

ISO2768-1 : CLASS OF TOLERANCE		SURFACE FINISH	
FOR LINEAR DIMENSIONS	f	g	v
0.5-3	±0.05	±0.1	—
3-6	±0.1	±0.2	±0.5
6-30	±0.1	±0.2	±1
30-120	±0.15	±0.3	±1.5
120-400	±0.2	±0.5	±2.5
400-1000	±0.3	±0.8	±4
FOR ANGULAR DIMENSIONS	±1°	±1' 30"	±3'
0-10	±1°	±1' 30"	±2'
10-50	±0' 30"	±0' 30"	±1'
50-120	±0' 20"	±0' 30"	±1'
120-400	±0' 10"	±0' 13"	±0' 30"

Mr.	DRG. NO.	TITLE / NAME	MAT'L	QT'Y	REFERENCE
U.H LEE	U.H LEE	U.H LEE		3	DATE 2012.01.27
TITLE OUT-LINE DRAWING (SH4140-RL)			MODEL SH4140-RL		
DRG. NO. SH4140-RL-OUT			SCALE 1/1	SIZE A3	REV 00
			SHEET 1/-		

1 2 3 4 5 6 7

A B C D E F

A3(420X297)