


LAYER	L
1	274
2	370
3	466

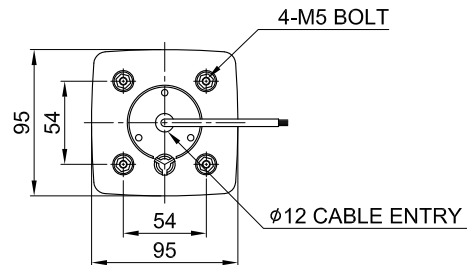

MARK	DATE	REVISION	REVISER	APP.BY
△1				
△2				
△3				

MODEL NO		SJDJL				
MATERIAL		HOUSING-ABS				
		LENS-AS				
		REFLECTOR-HEAT RESISTING ABS				
COLOR OF LENS		RED( ), AMBER( ), GREEN( )				
FLASHING PER MIN.		60 ~ 80				
USE VOLT.	LED	CURRENT	DC12V	0.08W	MAX. 0.337A	LAYER1
			DC24V		MAX. 0.326A	LAYER1
			AC110V		MAX. 0.124A	LAYER1
			AC220V		MAX. 0.062A	LAYER1
KIND OF SOUND		WS	5 Warning Sounds			
		WM	5 Melodie			
		WA	5 Alarms			
		WV	5 Customizable sounds			
VOLUME		MAX. 90dB at 1m				
PROTECTION GRADE		WATER & DUST PROOF IP23				
CABLE ENTRY		φ12 LEAD HOLE				
COLOR OF HOUSING		MAKER STANDARD				
ACTION		LED STEADY/FLASHING LIGHT				

ISO2768-1 : CLASS OF TOLERANCE						SURFACE FINISH
FOR LINEAR DIMENSIONS		f	m	⊙	v	
		0.5-3			±0.2	-
	3-6	±0.05	±0.1	±0.3	±0.5	
	6-30	±0.1	±0.2	±0.5	±1	
	30-120	±0.15	±0.3	±0.8	±1.5	
	120-400	±0.2	±0.5	±1.2	±2.5	
	400-1000	±0.3	±0.8	±2	±4	
FOR ANGULAR DIMENSIONS	0-10	±1°		±1°30'	±3°	
	10-50	±0°30'		±1°	±2°	
	50-120	±0°20'		±0°30'	±1°	
	120-400	±0°10'		±0°13'	±0°30'	

Nr.	DWG. NO.	TITLE/ NAME		MAT'L	1	-
DSND BY	CHKD BY	CHKD BY	APRV BY	VIEW	DATE	REFERENCE
S.H.KIM	J.H.PARK		J.K.HAN	3	2016.08.30	
TITLE			MODEL		SJDJL	
SJDJL OUTLINE DRAWING			DWG. NO.		SJDJL_OUT	
SCALE	SIZE	REV	SHEET			
N/S	A4	00	1/1			