


LAYER	L
1	183
2	279
3	375

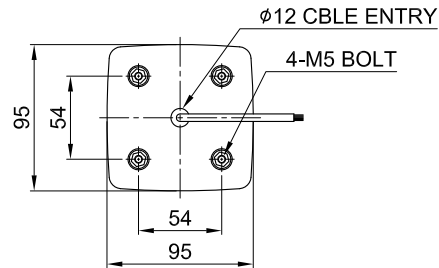

MARK	DATE	REVISION	REVISER	APP.BY
△1				
△2				
△3				

MODEL NO		SJ				
MATERIAL		HOUSING-ABS				
		LENS-AS				
		REFLECTOR-HEAT RESISTING ABS				
COLOR OF LENS		RED(), AMBER(), GREEN()				
REV. PER MIN.		120 ~ 140				
USE VOLT.	BULB	CURRENT	DC12V	5W	MAX. 0.488A	LAYER1
			DC24V		MAX. 0.310A	LAYER1
			AC110V		MAX. 0.102A	LAYER1
			AC220V		MAX. 0.051A	LAYER1
VOLUME		MAX. 90dB at 1m				
PROTECTION GRADE		WATER & DUST PROOF IP44				
CABLE ENTRY		φ12 LEAD HOLE				
COLOR OF HOUSING		MAKER STANDARD				
ACTION		BULB REVOLVING WARNING LIGHT				

FOR LINEAR DIMENSIONS	ISO2768-1 : CLASS OF TOLERANCE				
	f	m	Ⓢ	v	
0.5~3			±0.2	-	
3~6	±0.05	±0.1	±0.3	±0.5	
6~30	±0.1	±0.2	±0.5	±1	
30~120	±0.15	±0.3	±0.8	±1.5	
120~400	±0.2	±0.5	±1.2	±2.5	
400~1000	±0.3	±0.8	±2	±4	
FOR ANGULAR DIMENSIONS	±1°		±1°30'	±3°	
	±0°30'		±1°	±2°	
	±0°20'		±0°30'	±1°	
	±0°10'		±0°13'	±0°30'	

SURFACE FINISH			-		1	-
Nr.	DWG. NO.	TITLE/ NAME	MAT'L	QTY	REFERENCE	
DSND BY	CHKD BY	CHKD BY	APRV BY	VIEW	DATE	
S.H.KIM	J.H.PARK		J.K.HAN	3	2016.08.30	
TITLE			MODEL			
SJ OUTLINE DRAWING			SJ			
			DWG. NO.		SJ_OUT	
SCALE	SIZE	REV	SHEET			
N/S	A4	00	1/1			