


LAYER	L
1	162
2	256
3	350

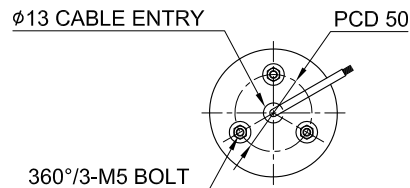

MARK	DATE	REVISION	REVISER	APP .BY
△1				
△2				
△3				

MODEL NO	SRL					
MATERIAL	HOUSING-ABS					
	LENS-AS					
	REFLECTOR-HEAT RESISTING ABS					
COLOR OF LENS	RED(), AMBER(), GREEN()					
FLASHING PER MIN.	60 ~ 80					
USE VOLT.	LED	CURRENT	DC12V	0.08W	MAX. 0.123A	LAYER1
			DC24V		MAX. 0.094A	LAYER1
			AC110V		MAX. 0.062A	LAYER1
			AC220V		MAX. 0.031A	LAYER1
PROTECTION GRADE	WATER & DUST PROOF IP44					
CABLE ENTRY	φ13 LEAD HOLE					
COLOR OF HOUSING	MAKER STANDARD					
ACTION	LED STEADY/FLASHING SIGNAL TOWERS					

ISO2768-1 : CLASS OF TOLERANCE						SURFACE FINISH	-			1	-	
FOR LINEAR DIMENSIONS	f	m	⊙	v			Nr.	DWG. NO.	TITLE/ NAME	MAT'L	QTY	REFERENCE
	0.5-3			±0.2	-	DSND BY	CHKD BY	CHKD BY	APRV BY	VIEW	DATE	
	3-6	±0.05	±0.1	±0.3	±0.5	S.H.KIM	J.H.PARK		J.K.HAN	3	2016.08.30	
	6-30	±0.1	±0.2	±0.5	±1	TITLE						
	30-120	±0.15	±0.3	±0.8	±1.5	SRL						
	120-400	±0.2	±0.5	±1.2	±2.5	OUTLINE DRAWING						
400-1000	±0.3	±0.8	±2	±4	MODEL							
FOR ANGULAR DIMENSIONS	0-10	±1°		±1°30'	±3°	SRL						
	10-50	±0°30'		±1°	±2°	DWG. NO.						
	50-120	±0°20'		±0°30'	±1°	SRL_OUT						
	120-400	±0°10'		±0°13'	±0°30'	SCALE	SIZE	REV	SHEET			
					N/S	A4	00	1/1				