


LAYER	L
1	363
2	457
3	551

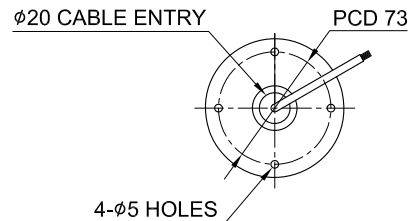

MARK	DATE	REVISION	REVISER	APP.BY
△1				
△2				
△3				

MODEL NO		SRP				
MATERIAL		HOUSING-ABS				
		LENS-AS				
		REFLECTOR-HEAT RESISTING ABS				
COLOR OF LENS		RED( ), AMBER( ), GREEN( )				
REV. PER MIN.		120 ~ 140				
USE VOLT.	BULB	CURRENT	DC12V	5W	MAX. 0.488A	LAYER1
			DC24V		MAX. 0.310A	LAYER1
			AC110V		MAX. 0.102A	LAYER1
			AC220V		MAX. 0.051A	LAYER1
PROTECTION GRADE		WATER & DUST PROOF IP44				
CABLE ENTRY		Ø20 LEAD HOLE				
COLOR OF HOUSING		MAKER STANDARD				
ACTION		BULB REVOLVING WARNING SIGNAL TOWERS				

ISO2768-1 : CLASS OF TOLERANCE						SURFACE FINISH	-		1		-	
FOR LINEAR DIMENSIONS	0.5-3	f	m	⊙	v		Nr.	DWG. NO.	TITLE/ NAME	MAT'L	QTY	REFERENCE
	3-6	±0.05	±0.1	±0.2	±0.5	S.H.KIM	J.H.PARK	J.K.HAN	J.K.HAN	3	2016.08.30	
	6-30	±0.1	±0.2	±0.5	±1	CHKD BY		APRV BY		DATE		
	30-120	±0.15	±0.3	±0.8	±1.5	TITLE		MODEL		SRP		
	120-400	±0.2	±0.5	±1.2	±2.5	SRP		SRP		SRP_OUT		
	400-1000	±0.3	±0.8	±2	±4	OUTLINE DRAWING		DWG. NO.		SRP_OUT		
	FOR ANGULAR DIMENSIONS	0-10	±1°		±1°30'	±3°	SCALE		SIZE	REV	SHEET	
10-50	±0°30'		±1°	±2°	N/S	A4	00	1/1				
50-120	±0°20'		±0°30'	±1°								
120-400	±0°10'		±0°13'	±0°30'								