


1 2 3 4 5 6

A


B

C

D

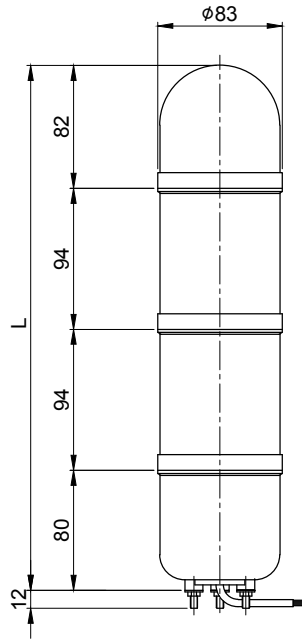

LAYER	L
1	162
2	256
3	350

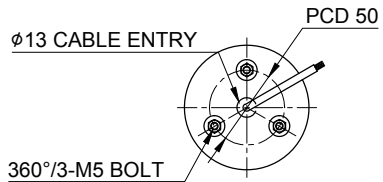

MARK	DATE	REVISION	REVISER	APP .BY
①				
②				
③				

MODEL NO		SR				
MATERIAL		HOUSING-ABS				
		LENS-AS				
		REFLECTOR-HEAT RESISTING ABS				
COLOR OF LENS		RED(), AMBER(), GREEN()				
REV. PER MIN		120 ~ 140				
USE VOLT.	BULB	CURRENT	DC12V	5W	MAX. 0.488A	LAYER1
			DC24V		MAX. 0.310A	LAYER1
			AC110V		MAX. 0.102A	LAYER1
			AC220V		MAX. 0.051A	LAYER1
PROTECTION GRADE		WATER & DUST PROOF IP44				
CABLE ENTRY		φ13 LEAD HOLE				
COLOR OF HOUSING		MAKER STANDARD				
ACTION		BULB REVOLVING WARNING LIGHT				

FOR LINEAR DIMENSIONS	ISO2768-1 : CLASS OF TOLERANCE					SURFACE FINISH
	f	m	Ⓢ	v		
0.5~3	±0.05	±0.1	±0.2	-		
3~6			±0.3	±0.5		
6~30	±0.1	±0.2	±0.5	±1		
30~120	±0.15	±0.3	±0.8	±1.5		
120~400	±0.2	±0.5	±1.2	±2.5		
400~1000	±0.3	±0.8	±2	±4		
FOR ANGULAR DIMENSIONS	0~10	±1°	±1°30'	±3°		
	10~50	±0°30'	±1°	±2°		
	50~120	±0°20'	±0°30'	±1°		
	120~400	±0°10'	±0°13'	±0°30'		

Nr.	DWG. NO.	TITLE/ NAME		MAT'L	QTY	REFERENCE
DSND BY	CHKD BY	CHKD BY	APRV BY	VIEW	DATE	
S.H.KIM	J.H.PARK		J.K.HAN	3	2016.08.30	
TITLE			MODEL			
SR OUTLINE DRAWING			SR			
			DWG. NO.	SR_OUT		
SCALE	SIZE	REV	SHEET			
N/S	A4	00	1/1			

1 2 3 4 5 6

A4(297X210)