



ST80ML-W □
ST80MLF-W □

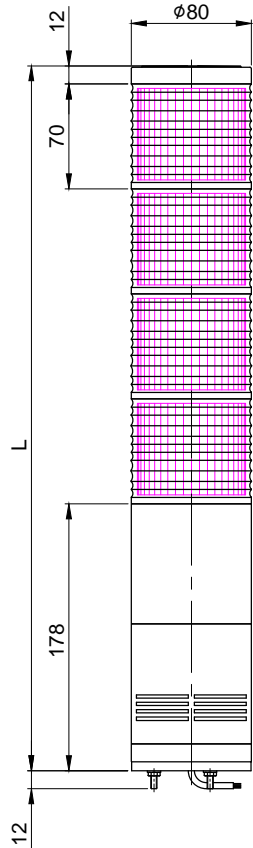

LAYER	L
1	260
2	330
3	400
4	470
5	540

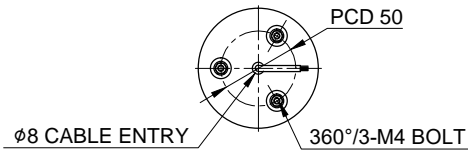

MARK	DATE	REVISION	REVISER	APP. BY
①				
②				
③				

MODEL NO		ST80ML-W			
MATERIAL		HOUSING-ABS			
		LENS-AS			
		-			
COLOR OF LENS		RED(), AMBER(), GREEN(), BLUE(), WHITE()			
FLASHING PER MIN.		60 - 80			
USE VOLT.	LED	CURRENT	DC12V	MAX. 0.176A	LAYER1
			DC24V	MAX. 0.111A	LAYER1
			AC110V	MAX. 0.082A	LAYER1
			AC220V	MAX. 0.057A	LAYER1
KIND OF SOUND		WS	5 Pre-Recorded Warning Sounds		
		WM	5 Pre-Recorded Melodies		
		WA	5 Pre-Recorded Alarms		
VOLUME		MAX. 85dB at 1m			
PROTECTION GRADE		WATER & DUST PROOF IP23			
CABLE ENTRY		ø8 LEAD HOLE			
COLOR OF HOUSING		MAKER STANDARD			
ACTION		LED STEADY/ FLASHING TOWER LAMP			

ISO2768-1 : CLASS OF TOLERANCE						SURFACE FINISH				1			
FOR LINEAR DIMENSIONS		f	m	⊙	v		Nr.	DWG. NO.	TITLE/ NAME	MAT'L	QTY	REFERENCE	
	0.5-3	±0.05	±0.1	±0.2	-	DSND BY	CHKD BY	CHKD BY	APRV BY	VIEW	DATE		
	3-6			±0.3	±0.5	S.H.KIM	J.H.PARK		J.K.HAN	3	2016.08.30		
	6-30	±0.1	±0.2	±0.5	±1	TITLE ST80ML-W							
	30-120	±0.15	±0.3	±0.8	±1.5	MODEL ST80ML-W							
	120-400	±0.2	±0.5	±1.2	±2.5	DWG. NO. ST80ML-W_OUT							
400-1000	±0.3	±0.8	±2	±4	SCALE N/S								
FOR ANGULAR DIMENSIONS	0-10	±1°	±1°30'	±3°	SIZE A4								
	10-50	±0°30'	±1°	±2°	REV 00								
	50-120	±0°20'	±0°30'	±1°	SHEET 1/1								
	120-400	±0°10'	±0°13'	±0°30'	A4(297X210)								