

1 2 3 4 5 6

A

A

B

B

C


C

D

D

MARK	DATE	REVISION	REVISER	APP .BY
①				
②				
③				

MODEL NO	STA35SLM			
MATERIAL	HOUSING-AL			
	LENS-AS			
-				
COLOR OF LENS RED(), AMBER(), GREEN(), BLUE(), WHITE()				
USE VOLT.	LED	CURRENT	DC12V	0.08W
			DC24V	
			MAX. 0.160A	LAYER1
			MAX. 0.080A	LAYER1
PROTECTION GRADE WATER & DUST PROOF IP44				
COLOR OF HOUSING MAKER STANDARD				
ACTION LED STEADY LIGHT				

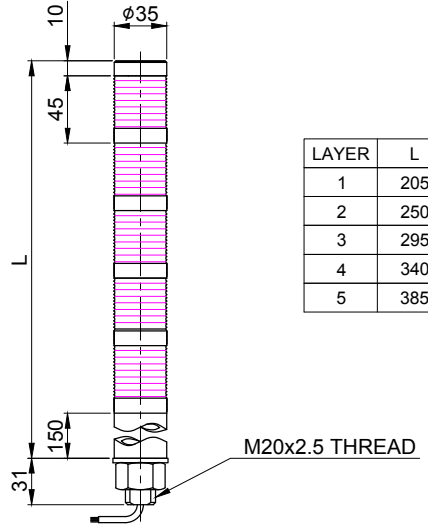

ISO2768-1 : CLASS OF TOLERANCE					SURFACE FINISH	-		1		-	
FOR LINEAR DIMENSIONS	f	m	(C)	v		Nr.	DWG. NO.	TITLE/ NAME	MAT'L	QTY	REFERENCE
	0.5~3	±0.05	±0.1	±0.2	-	DSND BY	CHKD BY	APRV BY	VIEW	DATE	
	3~6			±0.3	±0.5	S.H.KIM	J.H.PARK	J.K.HAN	3	2016.08.30	
	6~30	±0.1	±0.2	±0.5	±1	TITLE STA35SLM OUTLINE DRAWING					
	30~120	±0.15	±0.3	±0.8	±1.5	MODEL STA35SLM					
	120~400	±0.2	±0.5	±1.2	±2.5	DWG. NO. STA35SLM_OUT					
400~1000	±0.3	±0.8	±2	±4	SCALE N/S		SIZE A4	REV 00	SHEET 1/1		
FOR ANGULAR DIMENSIONS	0~10	±1°	±1°30'	±3°	A4(297X210)						
	10~50	±0°30'	±1°	±2°							
	50~120	±0°20'	±0°30'	±1°							
	120~400	±0°10'	±0°13'	±0°30'							

1 2 3 4 5 6

A4(297X210)