

1 2 3 4 5 6

A

A

B

B

C

C


D

D


MARK	DATE	REVISION	REVISER	APP .BY
①				
②				
③				

STA45SLMP

STA45SLMP-BZ

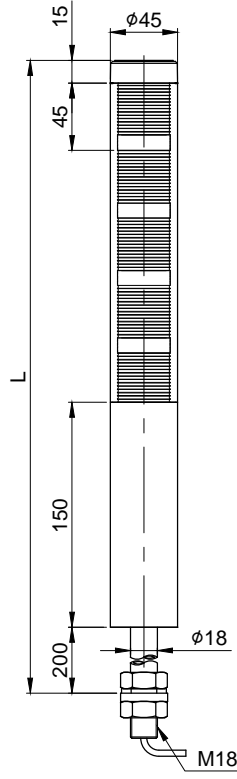

LAYER	L
1	398
2	443
3	488
4	533
5	578



MODEL NO		STA45SLMP				
MATERIAL		HOUSING-AL LENS-ACRYLIC FILTER LENS-AS				
COLOR OF LENS		RED(), AMBER(), GREEN(), BLUE(), WHITE()				
USE VOLT.	LED	CURRENT	DC12V	0.08W	MAX. 0.160A	LAYER1
			DC24V		MAX. 0.080A	LAYER1
			AC110V		MAX. 0.020A	LAYER1
			AC220V		MAX. 0.020A	LAYER1
VOLUME		MAX. 90dB at 1m				
PROTECTION GRADE		WATER & DUST PROOF IP44 (Buzzer Type IP23)				
COLOR OF HOUSING		MAKER STANDARD				
ACTION		LED STEADY LIGHT				

ISO2768-1 : CLASS OF TOLERANCE						SURFACE FINISH	-		1		-	
FOR LINEAR DIMENSIONS	f	m	⊙	v			Nr.	DWG. NO.	TITLE/ NAME	MAT'L	QTY	REFERENCE
	0.5-3	±0.05	±0.1	±0.2	-	DSND BY	CHKD BY	CHKD BY	APRV BY	VIEW	DATE	
	3-6			±0.3	±0.5	S.H.KIM	J.H.PARK		J.K.HAN	3	2016.08.30	
	6-30	±0.1	±0.2	±0.5	±1	TITLE STA45SLMP OUTLINE DRAWING						
	30-120	±0.15	±0.3	±0.8	±1.5	MODEL STA45SLMP						
	120-400	±0.2	±0.5	±1.2	±2.5	DWG. NO. STA45SLMP_OUT						
400-1000	±0.3	±0.8	±2	±4	SCALE N/S		SIZE A4	REV 00	SHEET 1/1			
FOR ANGULAR DIMENSIONS	0-10	±1°		±1°30'	±3°							
	10-50	±0°30'		±1°	±2°							
	50-120	±0°20'		±0°30'	±1°							
	120-400	±0°10'		±0°13'	±0°30'							

1 2 3 4 5 6

A4(297X210)