

1 2 3 4 5 6

A

B

C


D

MARK	DATE	REVISION	REVISER	APP.BY
△				
△				
△				

STC56L : DC
STC56LF : DC

STC56L : AC
STC56LF : AC
STC56L-BZ : DC
STC56LF-BZ : DC

STC56L-BZ : AC
STC56LF-BZ : AC

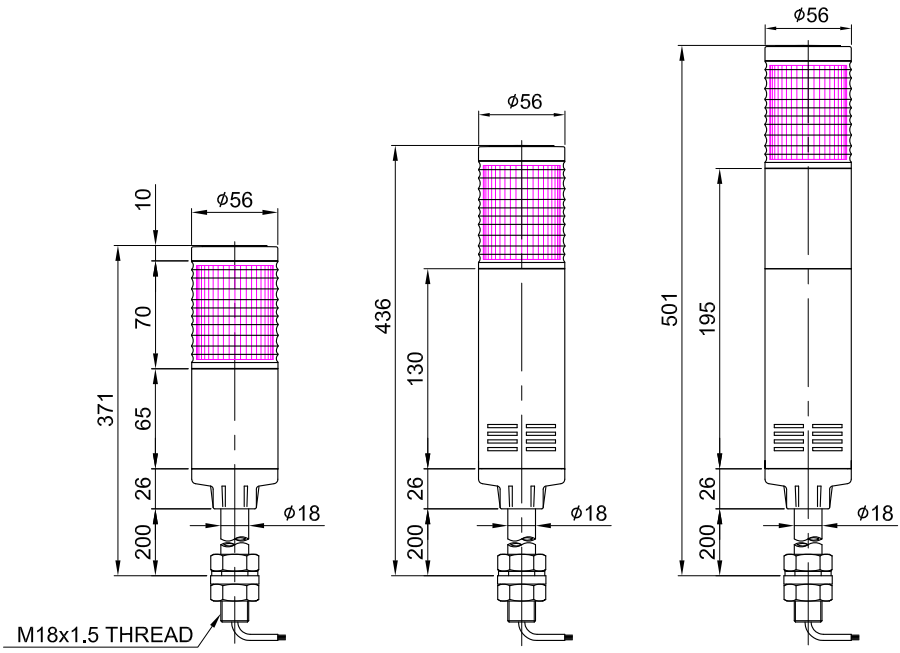

MODEL NO		STC56L			
MATERIAL		HOUSING-ABS			
		LENS-AS			
		POLE-AL			
COLOR OF LENS		CLEAR			
FLASHING PER MIN.		60 ~ 80			
USE VOLT.	LED	CURRENT	DC12V	0.08W	MAX. 0.277A
			DC24V		MAX. 0.188A
			AC110V		MAX. 0.057A
			AC220V		MAX. 0.028A
VOLUME		MAX. 90dB at 1m			
PROTECTION GRADE		WATER & DUST PROOF IP44(Buzzer Type IP23)			
CABLE ENTRY		ø8 LEAD HOLE			
COLOR OF HOUSING		MAKER STANDARD			
ACTION		MULTIPLE COLORS LED SIGNAL STEADY/ FLASHING LIGHT			

FOR LINEAR DIMENSIONS	ISO2768-1 : CLASS OF TOLERANCE				
	f	m	Ⓞ	v	
0.5-3			±0.2	-	
3-6	±0.05	±0.1	±0.3	±0.5	
6-30	±0.1	±0.2	±0.5	±1	
30-120	±0.15	±0.3	±0.8	±1.5	
120-400	±0.2	±0.5	±1.2	±2.5	
400-1000	±0.3	±0.8	±2	±4	
FOR ANGULAR DIMENSIONS	0-10	±1°		±1°30'	±3°
	10-50	±0°30'		±1°	±2°
	50-120	±0°20'		±0°30'	±1°
	120-400	±0°10'		±0°13'	±0°30'

-		-		-		-		1		-	
Nr.	DWG. NO.	TITLE/ NAME			MAT'L	QTY	REFERENCE				
DSND BY	CHKD BY	CHKD BY	APRV BY	VIEW	DATE						
S.H.KIM	J.H.PARK		J.K.HAN	3	2016.08.30						
TITLE					MODEL						
STC56L OUTLINE DRAWING					STC56L						
					DWG. NO.		STC56L_OUT				
SCALE		SIZE	REV	SHEET							
N/S		A4	00	1/1							

1 2 3 4 5 6

A4(297X210)