
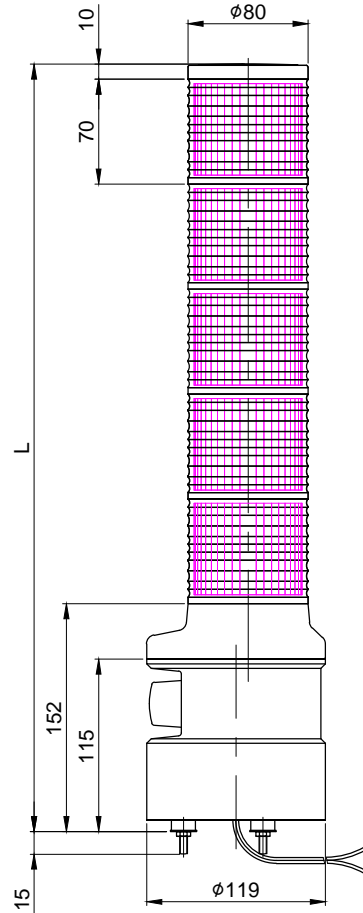


STDL/STDLF

LAYER	L
1	232
2	302
3	372
4	442
5	512

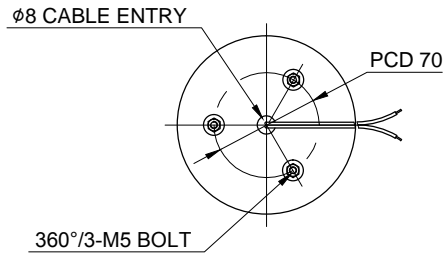

MARK	DATE	REVISION	REVISER	APP .BY
①				
②				
③				

MODEL NO		STDL				
MATERIAL		HOUSING-ABS				
		LENS-AS				
		REFLECTOR-HEAT RESISTING ABS				
COLOR OF LENS		RED(), AMBER(), GREEN(), BLUE(),WHITE()				
FLASHING PER MIN.		60 ~ 80				
USE VOLT.	LED	CURRENT	DC12V	0.08W	MAX. 0.380A	LAYER1
			DC24V		MAX. 0.330A	LAYER1
			AC110V		MAX. 0.115A	LAYER1
			AC220V		MAX. 0.058A	LAYER1
KIND OF SOUND		WS	5 Warning Sounds			
		WM	5 Melodie			
		WA	5 Alarms			
		WV	5 Customizable sounds			
VOLUME		MAX. 105dB at 1m				
PROTECTION GRADE		WATER & DUST PROOF IP54				
CABLE ENTRY		ø8 LEAD HOLE				
COLOR OF HOUSING		MAKER STANDARD				
ACTION		LED STEADY/FLASHING LIGHT				

	ISO2768-1 : CLASS OF TOLERANCE					SURFACE FINISH
	f	m	Ⓢ	v		
FOR LINEAR DIMENSIONS	0.5~3	±0.05	±0.1	±0.2	-	
	3~6			±0.3	±0.5	
	6~30	±0.1	±0.2	±0.5	±1	
	30~120	±0.15	±0.3	±0.8	±1.5	
	120~400	±0.2	±0.5	±1.2	±2.5	
	400~1000	±0.3	±0.8	±2	±4	
FOR ANGULAR DIMENSIONS	0~10	±1°		±1°30'	±3°	
	10~50	±0°30'		±1°	±2°	
	50~120	±0°20'		±0°30'	±1°	
	120~400	±0°10'		±0°13'	±0°30'	

Nr.	DWG. NO.	TITLE/NAME		MAT'L	QTY	REFERENCE
DSND BY	CHKD BY	CHKD BY	APRV BY	VIEW	DATE	
S.H.KIM	J.H.PARK		J.K.HAN	3	2016.08.30	
TITLE			MODEL			
STDL OUTLINE DRAWING			STDL			
			DWG. NO.	STDL_OUT		
SCALE	SIZE	REV	SHEET			
N/S	A4	00	1/1			