


STG50ML : DC
STG50MLF : DC
STG50ML-BZ : DC

STG50MLF-BZ : DC

STG50ML : AC
STG50MLF : AC
STG50ML-BZ : AC
STG50MLF-BZ : AC

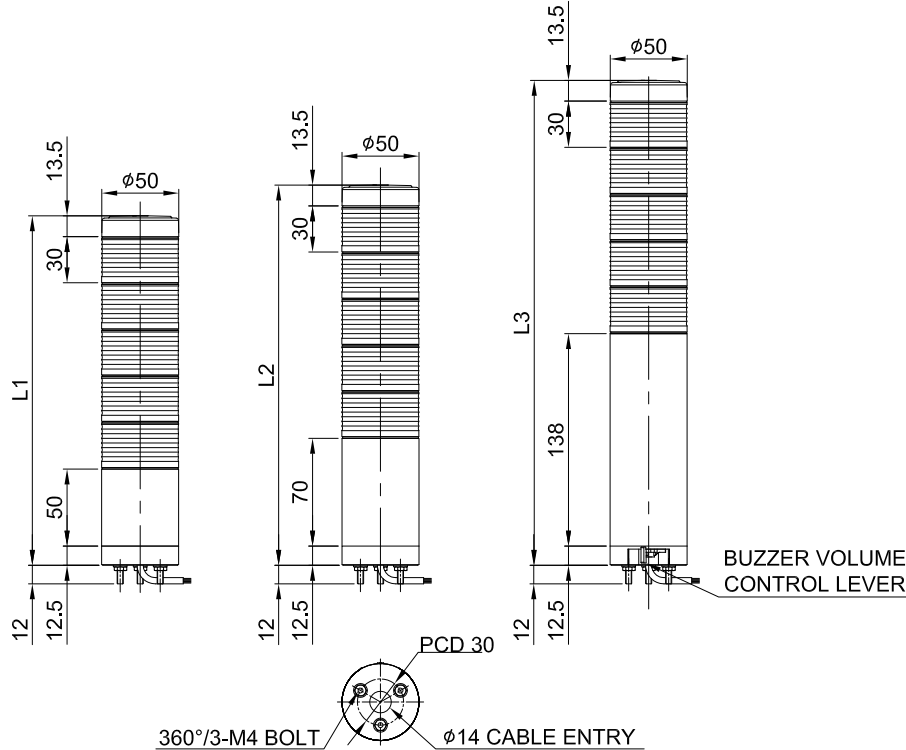

MARK	DATE	REVISION	REVISER	APP .BY
△				
△				
△				

MODEL NO		STG50ML/ ML-BZ/ STG50MLF/ MLF-BZ			
MATERIAL		HOUSING-ABS			
		LENS-AS			
		-			
COLOR OF LENS		RED(), AMBER(), GREEN(), BLUE(), WHITE()			
FLASHES. PER MIN		60 ~ 80			
USE VOLT.	LED	CURRNET	AC/DC12V	0.5W	MAX. 0.040A/LAYER1
			AC/DC24V		MAX. 0.020A/LAYER1
			AC110V		MAX. 0.035A/LAYER1
			AC220V		MAX. 0.035A/LAYER1
VOLUME		MAX. 85dB at 1m			
PROTECTION GRADE		WATER & DUST PROOF IP65 (BZ TYPE-IP54)			
CABLE ENTRY		ø14 LEAD HOLE			
COLOR OF HOUSING		MAKER STANDARD			
ACTION		LED STEADY / FLASHING LIGHT			

LAYER	L1	L2	L3
1	106	126	194
2	136	156	224
3	166	186	254
4	196	216	284
5	226	246	314

ISO2768-1 : CLASS OF TOLERANCE					
FOR LINEAR DIMENSIONS		f		m	
		0.5-3	3-6	0.2	0.3
	6-30	±0.1	±0.2	±0.5	±1
	30-120	±0.15	±0.3	±0.8	±1.5
	120-400	±0.2	±0.5	±1.2	±2.5
	400-1000	±0.3	±0.8	±2	±4
FOR ANGULAR DIMENSIONS		±1°		±1°30'	
		0-10	±1°	±1°30'	±3°
		10-50	±0°30'	±1°	±2°
		50-120	±0°20'	±0°30'	±1°
	120-400	±0°10'	±0°13'	±0°30'	

SURFACE FINISH		-		1		-	
Nr.	DWG. NO.	TITLE/ NAME		MAT'L	QTY	REFERENCE	
DSND BY	CHKD BY	CHKD BY		APRV BY	VIEW	DATE	
S.H.KIM	J.H.PARK			J.K.HAN	3	2016.08.30	
TITLE				MODEL			
STG50ML SERIES OUTLINE DRAWING				STG50ML SERIES			
				DWG. NO.			
				STG50ML SERIES-OUT			
SCALE		SIZE	REV	SHEET			
N/S		A4	00	1/1			