
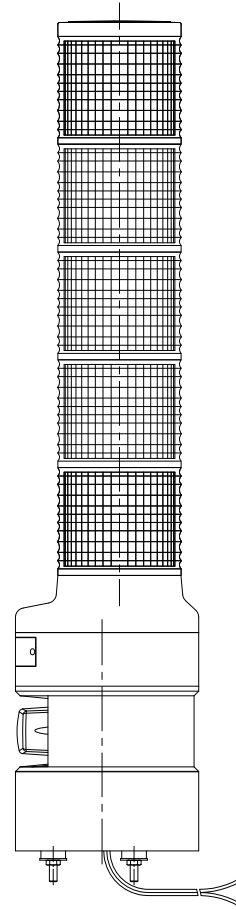


STNDL / STNDLF

LAYER	L
1	267
2	337
3	407
4	477
5	547

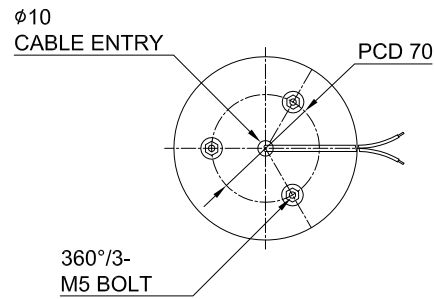

MARK	DATE	REVISION	REVISER	APP.BY
△				
△				
△				

MODEL NO		STNDL / STNDLF			
MATERIAL		HOUSING-ABS			
		LENS-AS			
		-			
COLOR OF LENS		RED(), AMBER(), GREEN(), BLUE(), WHITE()			
FLASHES. PER MIN		60 ~ 80			
USE VOLT.	LED	CURRNET	DC12V	0.5W	MAX. 0.610A/LAYER1
			DC24V		MAX. 0.330A/LAYER1
			AC110V		MAX. 0.154A/LAYER1
			AC220V		MAX. 0.087A/LAYER1
KIND OF SOUND		WS	WARNING SOUNDS		
		WP	SPECIAL WARNING SOUNDS 1ST GR.		
		WM	MELODIES		
		WA	ALARMS		
		WO	SPECIAL WARNING SOUNDS 2ND GR.		
		WN	SPECIAL WARNING SOUNDS 3RD GR.		
VOLUME		MAX. 105dB at 1m			
PROTECTION GRADE		WATER & DUST PROOF IP54			
CABLE ENTRY		φ10 LEAD HOLE			
COLOR OF HOUSING		MAKER STANDARD			
ACTION		LED STEADY / FLASHING LIGHT			

	ISO2768-1 : CLASS OF TOLERANCE					SURFACE FINISH
	f	m	⊙	v	-	
FOR LINEAR DIMENSIONS	0.5-3			±0.2	-	
	3-6	±0.05	±0.1	±0.3	±0.5	
	6-30	±0.1	±0.2	±0.5	±1	
	30-120	±0.15	±0.3	±0.8	±1.5	
	120-400	±0.2	±0.5	±1.2	±2.5	
	400-1000	±0.3	±0.8	±2	±4	
FOR ANGULAR DIMENSIONS	0-10	±1°		±1°30'	±3°	
	10-50	±0°30'		±1°	±2°	
	50-120	±0°20'		±0°30'	±1°	
	120-400	±0°10'		±0°13'	±0°30'	

Nr.	DWG. NO.	TITLE / NAME		MAT'L	1	-
DSND BY	CHKD BY	CHKD BY	APRV BY	VIEW	DATE	REFERENCE
S.H.KIM	J.H.PARK		J.K.HAN	3	2016.08.30	
TITLE			MODEL			
STNDL / STNDLF OUTLINE DRAWING			STNDL / STNDLF			
			DWG. NO.			
			STNDL / STNDLF_OUT			
SCALE	SIZE	REV	SHEET			
N/S	A4	00	1/1			