

1 2 3 4 5 6

A

A

B

B

C



C

D

D

MARK	DATE	REVISION	REVISER	APP .BY
①				
②				
③				

MODEL NO		SWT				
MATERIAL		HOUSING-ABS				
		LENS-PC				
		COVER-ABS				
		FILTER LENS-PC				
COLOR OF LENS		RED( ), AMBER( ), GREEN( )				
FLASHING PER MIN.		60 ~ 80				
USE VOLT.	LED	CURRENT	DC12V	0.08W	MAX. 0.095A	LAYER2
			DC24V		MAX. 0.063A	LAYER2
			AC110V		MAX. 0.048A	LAYER2
			AC220V		MAX. 0.024A	LAYER2
VOLUME		MAX. 90dB at 1m				
PROTECTION GRADE		WATER & DUST PROOF IP55				
CABLE ENTRY		ø12 LEAD HOLE				
COLOR OF HOUSING		MAKER STANDARD				
ACTION		LED STEADY/ FLASHING LIGHT				

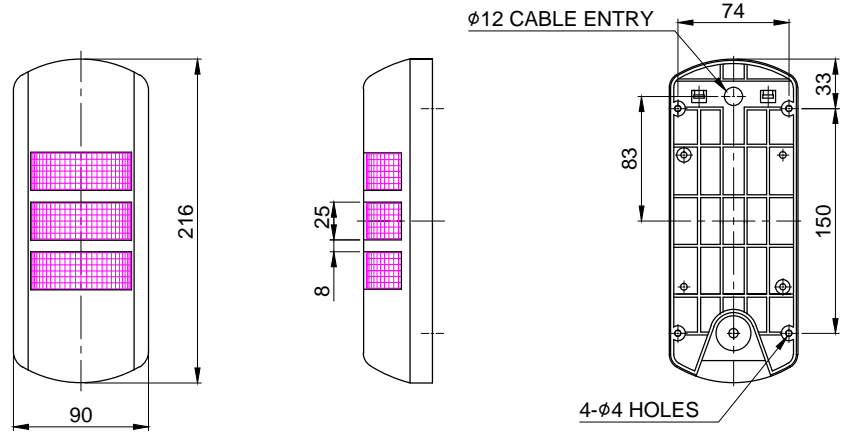

FOR LINEAR DIMENSIONS	ISO2768-1 : CLASS OF TOLERANCE				
	f	m	Ⓢ	v	
0.5-3	±0.05	±0.1	±0.2	-	
3-6			±0.3	±0.5	
6-30	±0.1	±0.2	±0.5	±1	
30-120	±0.15	±0.3	±0.8	±1.5	
120-400	±0.2	±0.5	±1.2	±2.5	
400-1000	±0.3	±0.8	±2	±4	
FOR ANGULAR DIMENSIONS	0-10	±1°	±1°30'	±3°	
	10-50	±0°30'	±1°	±2°	
	50-120	±0°20'	±0°30'	±1°	
	120-400	±0°10'	±0°13'	±0°30'	

SURFACE FINISH		-		-		-		1		-	
Nr.	DWG. NO.	TITLE/ NAME		MAT'L		QTY		REFERENCE			
DSND BY	CHKD BY	CHKD BY		APRV BY		VIEW		DATE			
S.H.KIM	J.H.PARK			J.K.HAN		3		2016.08.30			
TITLE				SWT		MODEL		SWT			
				OUTLINE DRAWING		DWG. NO.		SWT_OUT			
SCALE		SIZE		REV		SHEET					
N/S		A4		00		1/1					

1 2 3 4 5 6

A4(297X210)